

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 24 TWN. 14_N RNG. 2_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 4-6-10
Party Chief: Wilcoxen
Crew: Finney
Type of Marker: Harrison (Broken)
Method of Establishment: County: 3-8-1996
IN S.P.C. E Zone, NAD 83 (1986)
Name: 14022404
N: 487 767.988 2 (m)
E: 48 290.141 4 (m)

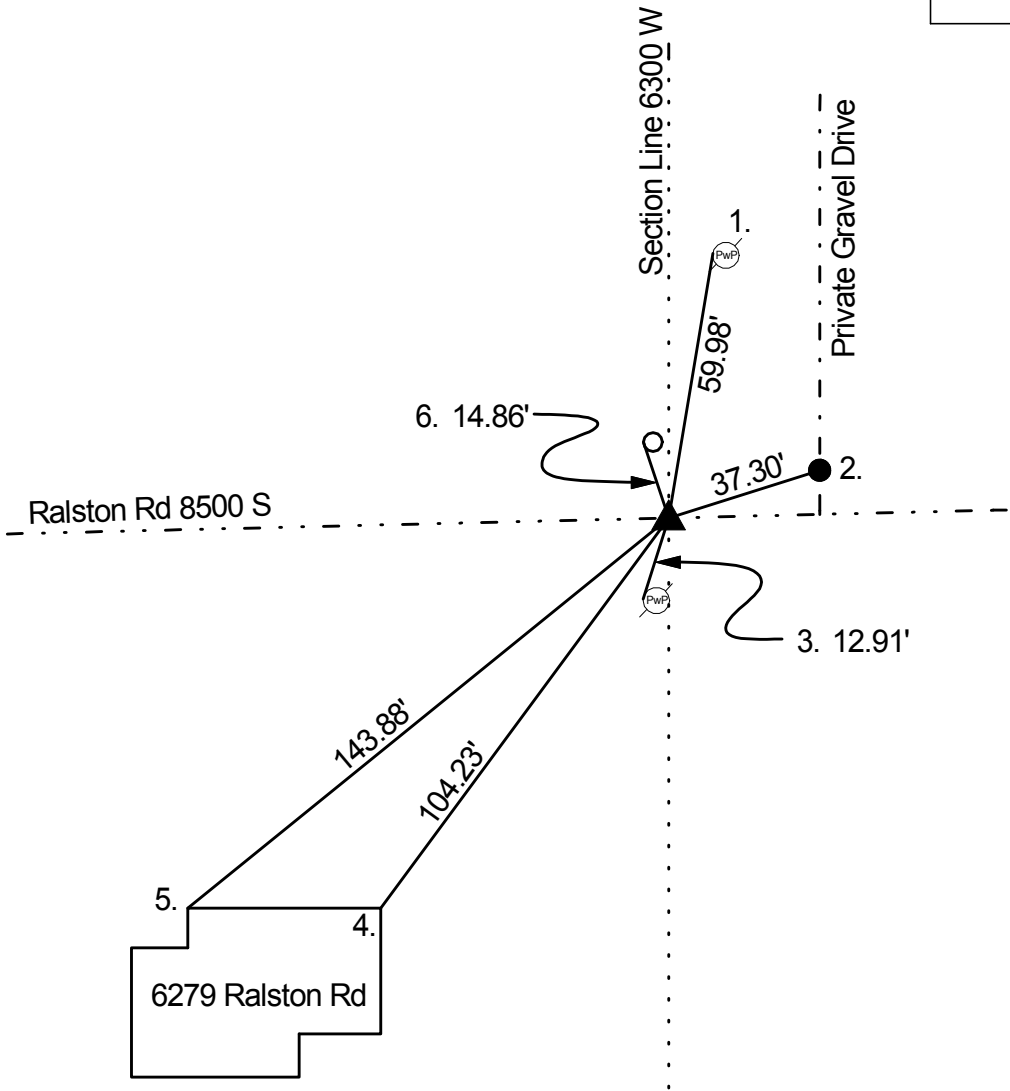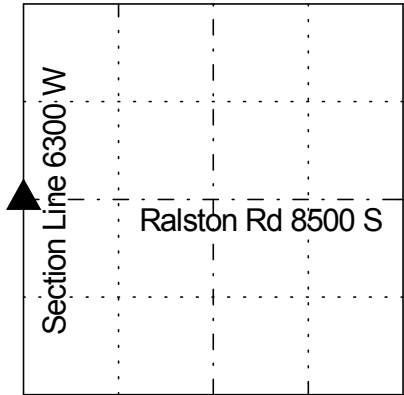

Original post set 1820 by Laughlin with witnesses: 14" Beech N 51 E 4 links; 14" Beech S 40 W 47 links per Marion County Atlas pg. 1. Survey by Julian in 1893 called stone set with no mention of witnesses. 4-7-1961 Monroe called pipe. 8-29-67 Bookedis called PK nail over pipe. 11-20-74 McLand called pipe. 7-9-85 Greene called same. 7-20-91 Kiste called a RR spike over 1" pipe. 6-6-91 Greene found RR spike at surface. Large road nail found 4" down. Iron pipe found 4" down. No stone found. Harrison set. Retied 3-8-1996 by Wilcoxen. Retied 12-31-2000 by Kiste. Retied 2-2-05 by Wilcoxen. Retied 4-6-10 by Wilcoxen.

REF	DISTANCE	DESCRIPTION
1.	59.98'	PK nail W PwP #97-773 12" up
2.	37.30'	Rebar in center of gravel drive at edge of road pavement 6280 Ralston Rd
3.	12.91'	PK nail W PwP #18-803 12" up
4.	104.23'	NE corner of garage foundation 6279 Ralston Rd
5.	143.88'	NW corner of foundation for concrete porch 6279 Ralston Rd
6.	14.86'	PK nail W fence post 2" up